


SMARTACCESS - Mobile Elevating Work Platforms

• 13.5M • 17M • 23 M •


- Compact, lightweight and agile – fit through most standard doorways.
- Low ground weight pressures for use on gymnasium floors etc.
- Tracks and spider stabilisers allow travel and set up on uneven sites.
- 200kg SWL in platform over full working range.
- Single basket available with 23m for very tight spots.
- 17m + 23m have rotating baskets and expanding track widths.
- Power outlet in all baskets, water/air outlet in 23m.
- 320°-330°-340° turret rotations.

ELEVATING WORK PLATFORMS – WORK AREAS FOR THREE MODELS

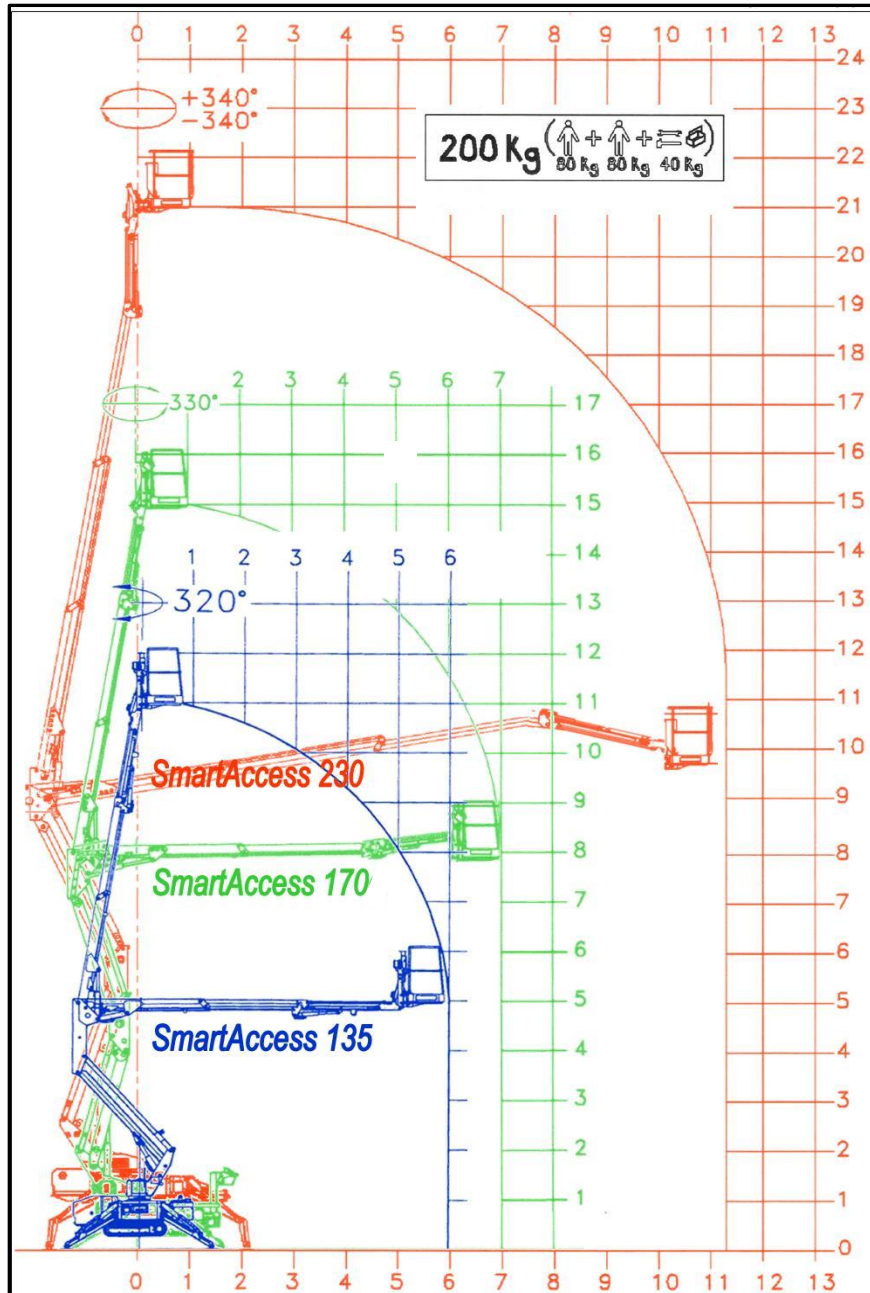


SMART LIFT ELEVATING WORK PLATFORMS		13.5m <i>w Fixed Platform</i>	17m <i>w Rotating Platform</i>	23m <i>w Rotating Platform</i>
WORKING HEIGHT	<i>Actual Working Height</i>	13m	17m	23m
	<i>To basket floor</i>	11m	15m	21m
MAX. RADIUS	<i>From centre plate's centre to platform edge</i>	6m	7m	11.2m
MAX. WORKING RADIUS		6.5m	7.5m	11.7m
MAX. ALLOWED WIND SPEED		12.5 m/sec	12.5 m/sec	12.5 m/sec
TURRET ROTATION		320°	330°	340°
MAX. SWL PLATFORM	<i>~2persons + 40kg tools</i>	200kg	200kg	200kg
WORK PLATFORM SIZE	<i>Two person platform</i>	1300x700x1100mm	1300x700x1100mm	1300x700x1100mm
MAX. ALLOWED MANUAL LATERAL FORCE		20 daN	40 daN	40 daN
DIMENSIONS (stowed for travel)	<i>Overall Length</i>	3,760mm	4,500mm	5,337mm
	<i>Overall Width</i>	780mm	780 - 1,280mm	780 - 1,290mm
	<i>Overall Height</i>	2,000mm	2,000mm	2,000mm
TOTAL GVM WEIGHT		1,600kg	2,050kg	3,000kg
STABILISER MAX. GROUND REACTION FORCE		1,500 daN	1,700 daN	2,800 daN
MAX. ALLOWED GROUND INCLINE		3°	3°	3°
MAX. ALLOWED FRAME INCLINE		0°	0°	0°

TRACCESS 135 – 13.5M ELEVATING WORK PLATFORM

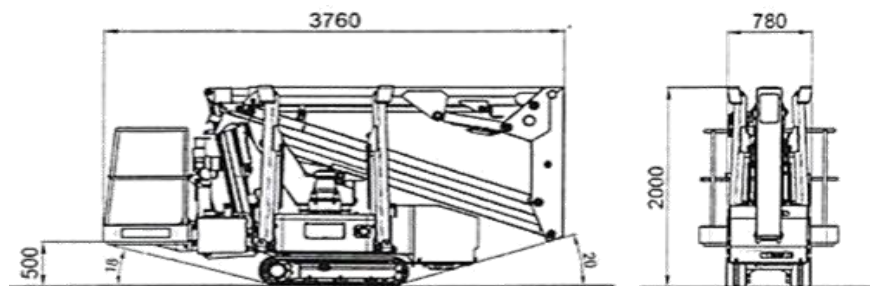

TRACCESS 170 – 17M ELEVATING WORK PLATFORM

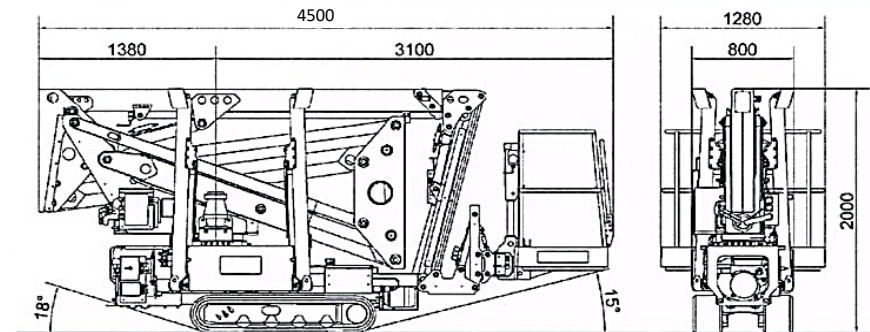

TRACCESS 230 – 23M ELEVATING WORK PLATFORM

